


# Commando-M CE36029

Commando-M, which is mainly used in asset management, electrical appliances and metal shelves warehousing management. Have the advantages of impact resistance waterproof, dustproof, stable performance characteristics.

## Physical Specification

Dimension	103*24*6.8 mm
Encasement:	PC
Color:	GV Customized Printing available
Printing:	Laser/Variable printing
Mount way:	Adhesive/screw

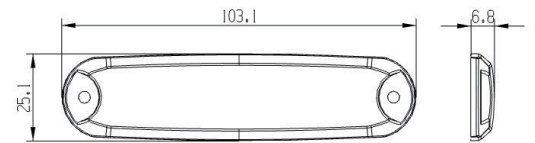


## Electrical Specification

Protocol:	ISO/IEC 18000-6C EPC Class1 Gen2
Operating Frequency:	902~928MHz(US)
Integrated Circuit [IC]:	H3
EPC Memory:	96Bits
User Memory:	512Bits
Unique TID:	96Bits
Access Password:	32 Bits
Kill Password:	32 Bits
Read Range:	up to 4m
Expected read cycles:	100,000 cycles
Data retention	10 years

## Radiation Patterns

### Read Range

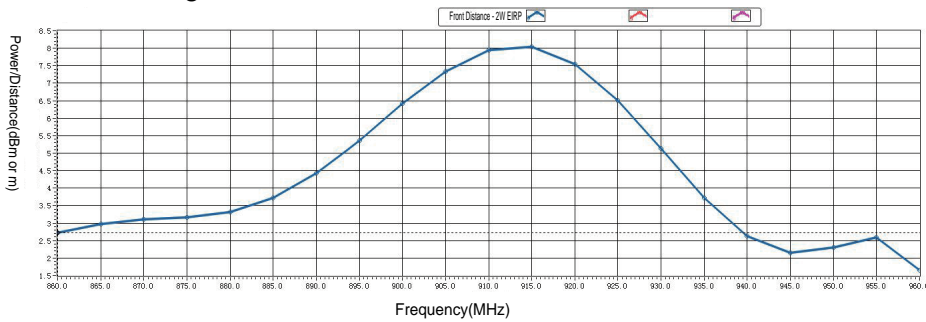

## Packing information

Packing Format:	Box
Weight per pieces:	14.4g
Quantity per box:	1000pcs
Box Dimension:	52*32*23cm
Weight per box:	14.9kg
Quality Assurance:	100% performance tested

## Environmental

Operating Temperature:	-20~60°C
Operating Humidity:	30%~70%
Storage Temperature:	-20~60°C
Storage Humidity:	30%~70%
IP Rating:	IP68
Chemical resistance	Resistance to weak acid and weak base
Expected lifetime:	10 years
Guarantee:	2 years
Certificate:	CE RoHS

